


# KGK2 Series

Pneumatic cylinder/Low friction cylinder  
 Ø40, Ø50, Ø63, Ø80, Ø100

Products in this series are applied with pistons with low-sliding-friction. Especially suitable for operating in a low-pressure, smooth-acting environment



## Ordering Instructions



① Bore (mm)

② Stroke (mm)

③ Mounting


## Specifications

Action	Unit	Double-acting
Fluid		Non-lubricated air/ lubricated air
Pressure range	MPa(kgf/cm <sup>2</sup> )	0.01~0.7[0.1~7.1]
Temperature range	°C	5~60
Cushion		Standard
Mounting		Standard type Axial foot Rod side flange Head side flange Eye Clevis Center trunnion

(Note) Converting to SI unit: 0.1MPa=1.02kgf/cm<sup>2</sup>

## Construction and dimensions

(Unit: mm)

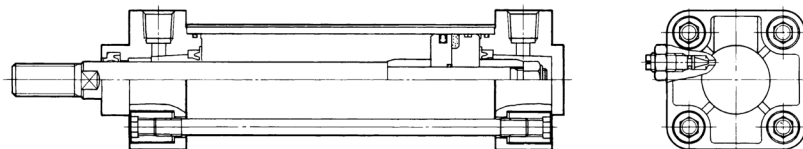

(Note) Other dimensions are the same with K series Standard type.