


KGO Series

Pneumatic cylinder/Air-hydro cylinder
Ø40, Ø50, Ø63, Ø80, Ø100

Cylinder of this series are for air-hydro systems and are suitable for use at low speeds of 50mm/s or less.



Ordering Instructions



- ① Bore (mm)
- ② Stroke (mm)
- ③ Mounting


Specifications

Action	Unit	Double-acting
Fluid		Oil
Pressure range	MPa(kgf/cm ²)	0.05~1[0.5~10.2]
Temperature range	°C	5~60
Piston speed range	mm/s	1~300
Cushion		Standard
Mounting		Standard type Axial foot Rod side flange Head side flange Eye Clevis Center trunnion

(Note) Recommend oil: ISO VG32.

Construction and dimensions

(Unit: mm)

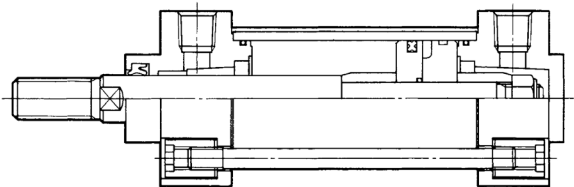

(Note) Other dimensions are the same with K series Standard type.